

Date:	
Type:	
Firm Name:	
Project:	




Optic Max 2D Mini Series

Everylite Datasheet Ver 3.0.0
Revision Date 06/2021



Features

- The smallest LED from this series, perfect for small stroke or thin spaces applications
- Preinstalled double-sided tape for a quick layout and screw holes in all modules for easy permanent installation
- Incredible 145° optical lens provides maximum, even light output across the sign face
- IP66 and UV resistant with fully integrated molding and lens
- 50000 hours rated lifetime
- UL, CE and RoHS

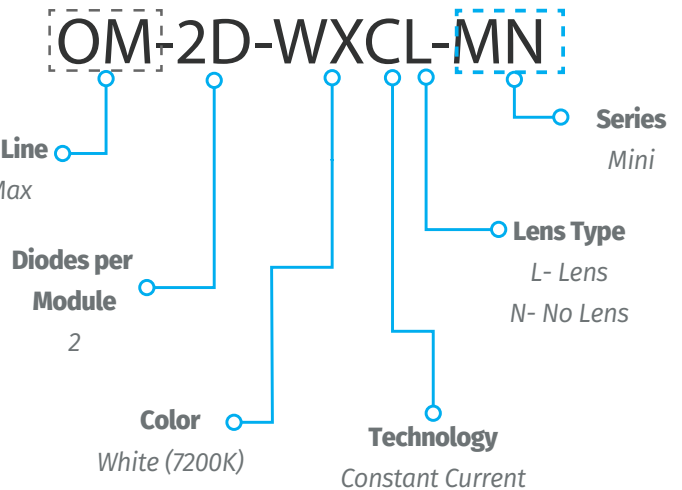

OpticMax 2D Mini Series Parameters

Item #	Color	Peak Wave Length	module/ft	Lm/module	Lm/ft	Lm/W	W/module	W/ft	Input Voltage	Viewing Angle	Waterproof
OM-2D-W7CL-MN	Cool White	7200K	5.0	53	265	174	0.2	1.0	24	145°	IP66

Power Supply Maximum Loading Capacity*

Power Supply	20W	60W	100W	150W	240W
By Module	90 mods	270 mods	450 mods	675 mods	1080 mods
By Footage	18 ft	54 ft	90 ft	135 ft	216 ft

*Due to voltage drop, a maximum of 50 modules can be run before power needs to be reintroduced into the line of modules.

Drawing

Unit: inches

