

Date:	
Type:	
Firm Name:	
Project:	



High Efficiency

Panoramic 2D Series


Everylite Datasheet Ver 3.1.0
Revision Date 12/2021



Features

- Panoramic Series 2-diode LED module for all your standard signage applications
- Preinstalled double sided tape for a quick layout and screw holes in all modules for easy permanent installation
- Incredible 170° degree beam angle means better coverage and no hot spots
- 2835 surface mount LED with a high luminous efficacy
- Perfect color consistency with in-house color binning
- 50,000 hours rated lifetime
- UL, CE and RoHS

PA-2D-W6CL-HE

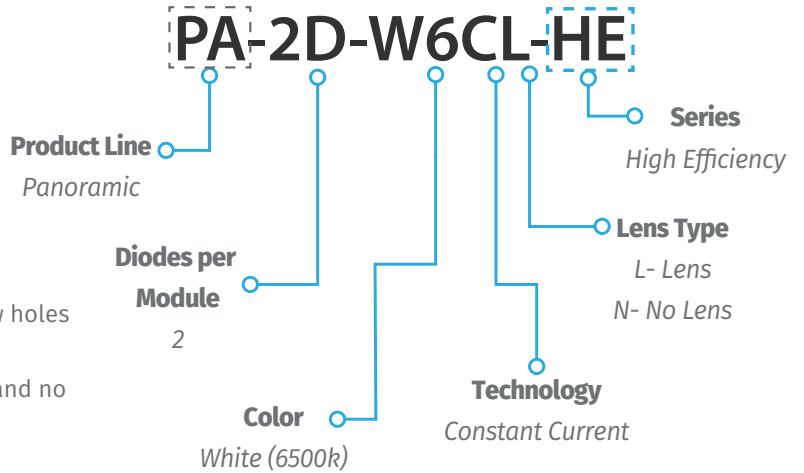

Panoramic 2D High Efficiency Series Parameters

Item #	Color	Peak Wave Length	module/ft	Lm/module	Lm/ft	Lm/W	W/module	W/ft	Input Voltage	Viewing Angle	Waterproof
PA-2D-W6CL-HE	Pure White	6500K	1.7	71	121	145	0.5	0.85	24	170°	IP66

Power Supply Maximum Loading Capacity*

Power Supply	20W	60W	100W	150W	240W
By Module	36 mods	108 mods	180 mods	270 mods	432 mods
By Footage	21 ft	64ft	106 ft	157 ft	254 ft

*Due to voltage drop, a maximum of 50 modules can be run before power needs to be reintroduced into the line of modules.

Drawing

Unit: inches

