

Date:	<input type="text"/>
Type:	<input type="text"/>
Firm Name:	<input type="text"/>
Project:	<input type="text"/>



Double Sided

EZBeam Energy Series

Everylite Datasheet Ver 1.4

- Our super wide 175° beam angle allows the product to be placed up to 24" between runs with minimum 6" distance between sign face and module
- Aluminum Mounting Bar uses an End Connector allowing EZBeam to be installed in new signage applications
- Available in 2, 3, 4, 5 ft. Aluminum Mounting Bar with easy middle connector allows you to create desired length




EZBeam Parameters (6 watt version)

Item #	Color	Peak Wave Length	Module(s)	Lm/module	Lm/ft	Lm/W	Wattage	W/ft	Viewing Angle	Waterproof
EZ-3D-W6CL-DS	Pure White	6500K	1	529	529	88	6	6	175°	IP65
EZ-2F-W6CL-EG	Pure White	6500K	2	529	529	88	12	6	175°	IP65
EZ-3F-W6CL-EG	Pure White	6500K	3	529	529	88	18	6	175°	IP65
EZ-4F-W6CL-EG	Pure White	6500K	4	529	529	88	24	6	175°	IP65
EZ-5F-W6CL-EG	Pure White	6500K	5	529	529	88	30	6	175°	IP65

Power Supply Maximum Loading Capacity

Power Supply	20W	30W	60W	100W	150W
By Module	3 mod.	4 mod.	9 mod.	15 mod.	22 mod.
By Footage	3 ft	4 ft	9 ft	15 ft	22 ft

Drawing

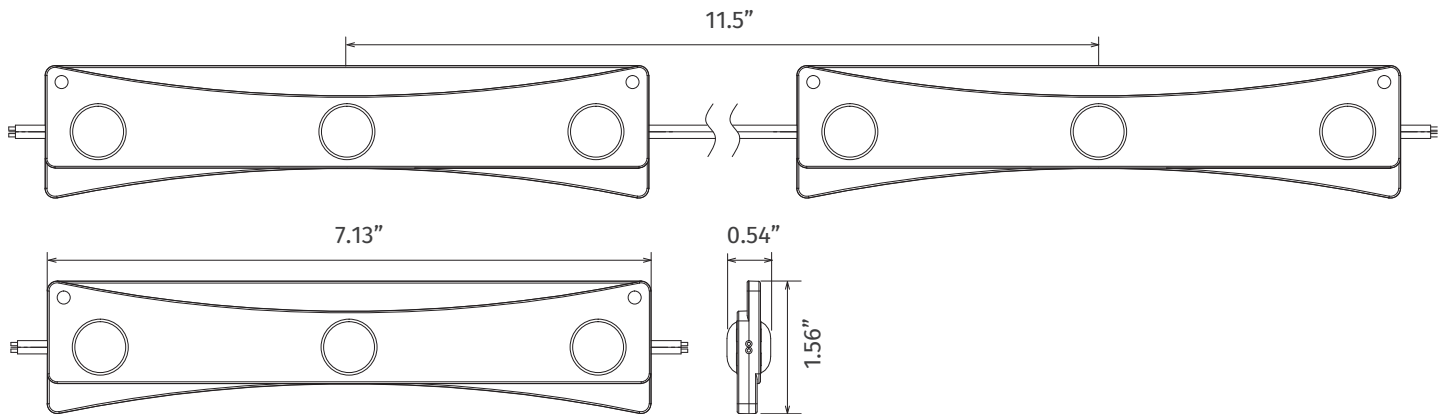

EZBeam Parameters (5 watt version)

Item #	Color	Peak Wave Length	Module(s)	Lm/module	Lm/ft	Lm/W	Wattage	W/ft	Viewing Angle	Waterproof
EZ-3D-W6CL-DS	Pure White	6500K	1	480	480	96	5	5	175°	IP65
EZ-2F-W6CL-EG	Pure White	6500K	2	480	480	96	10	5	175°	IP65
EZ-3F-W6CL-EG	Pure White	6500K	3	480	480	96	15	5	175°	IP65
EZ-4F-W6CL-EG	Pure White	6500K	4	480	480	96	20	5	175°	IP65
EZ-5F-W6CL-EG	Pure White	6500K	5	480	480	96	25	5	175°	IP65

Power Supply Maximum Loading Capacity

Power Supply	20W	30W	60W	100W	150W
By Module	3 mod.	5 mod.	10 mod.	18 mod.	27 mod.
By Footage	3 ft	5 ft	10 ft	18 ft	27 ft

Drawing

